



**Instructions for electrician**  
**STEPS 2 - 21**

**WARNING:**




**Electrical Danger Turn Power Off**

All electrical components must be installed by a licensed electrician in accordance with the National Electric Code and the appropriate local electrical codes.

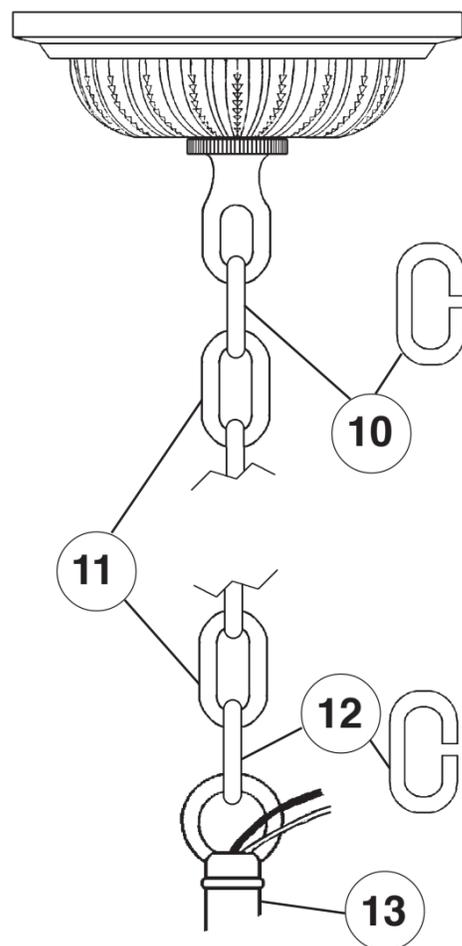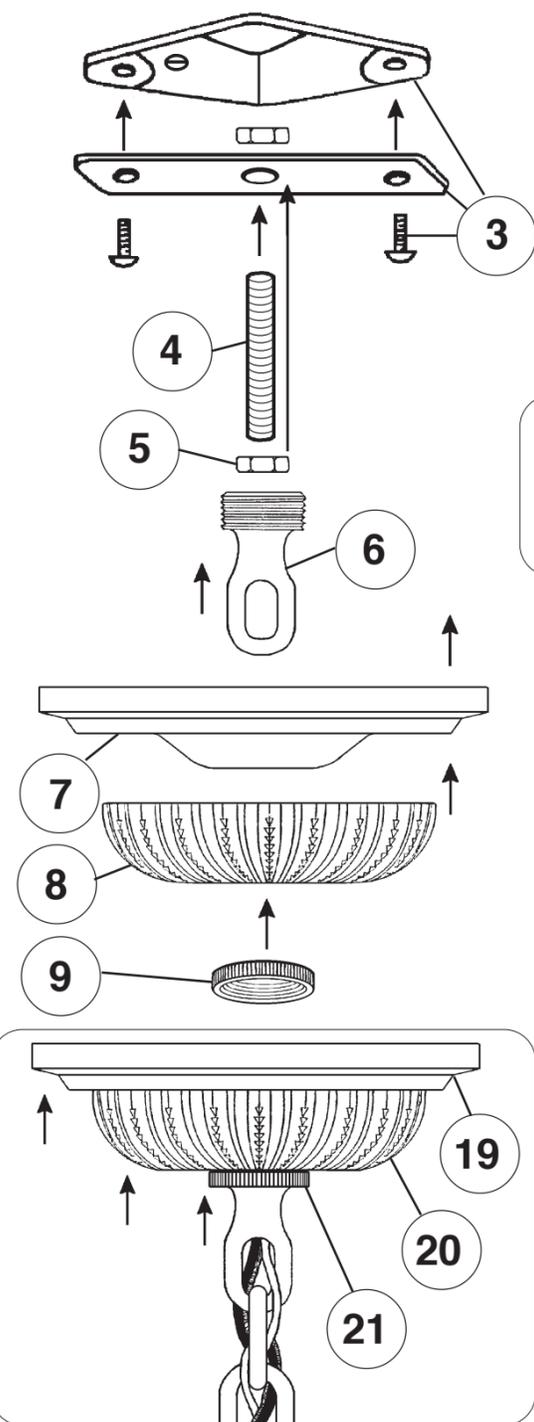

**MAKE SURE THE LOOSE GALLERY RING IS INSTALLED (SLIDE DOWN OVER CENTER COLUMN!) BEFORE CONNECTING FIXTURE WITH CONNECTING LINKS!!**

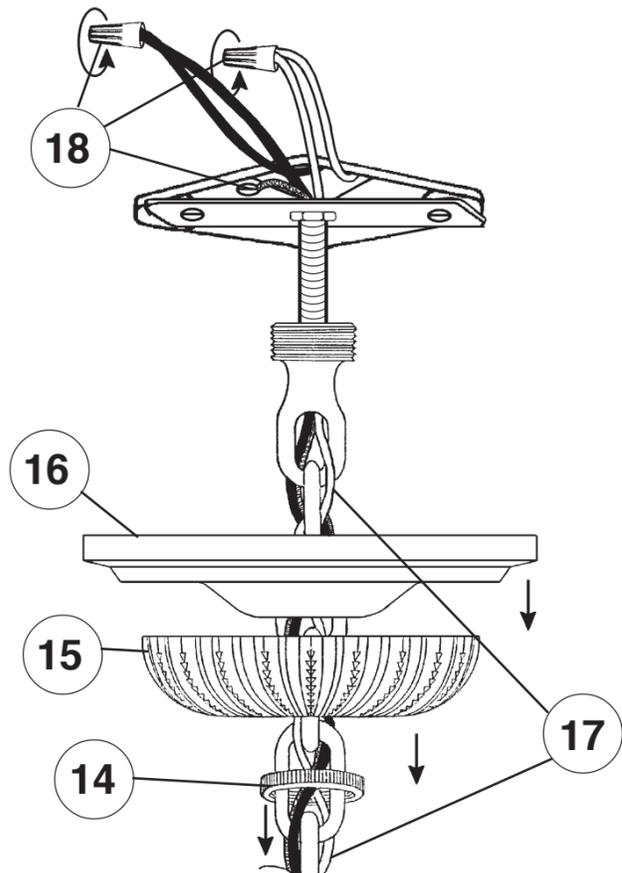

**CHANDELIER 6618-\_\_\_\_S TRIM DIAGRAM**

(Finish Option)



23 Lights  
Diameter: 24"  
Body Length: 34"  
Hanging Weight: 22 pounds

**T** HIS DESIGN IS THE PROPRIETARY TRADE DRESS/TRADE MARK OF SCHONBEK WORLDWIDE LIGHTING INC.

**SCHONBEK®**

**See diagram on back page**  
**Follow steps in exact order**  
**Save this trim diagram for future reference**

**1** **IMPORTANT**  
**Person who opens carton should record the following information for future service.**  
CODE # \_\_\_\_\_ Four-digit number on outside of carton.  
PACKER # \_\_\_\_\_ See crystal package label.  
ORDER # \_\_\_\_\_ See crystal package label.

SCHONBEK IS A WORLD LEADER IN CHANDELIER DESIGN. PATENTS INCLUDE:  
#D5,144,541

# Instructions for crystal trimming

## STEPS 22 - 28


**22**



You will need 23 - B10  
25 Watts Recommended  
60 Watts Max

Install bulbs and be sure  
to test fixture BEFORE  
trimming.

LOOSE  
GALLERY  
RING

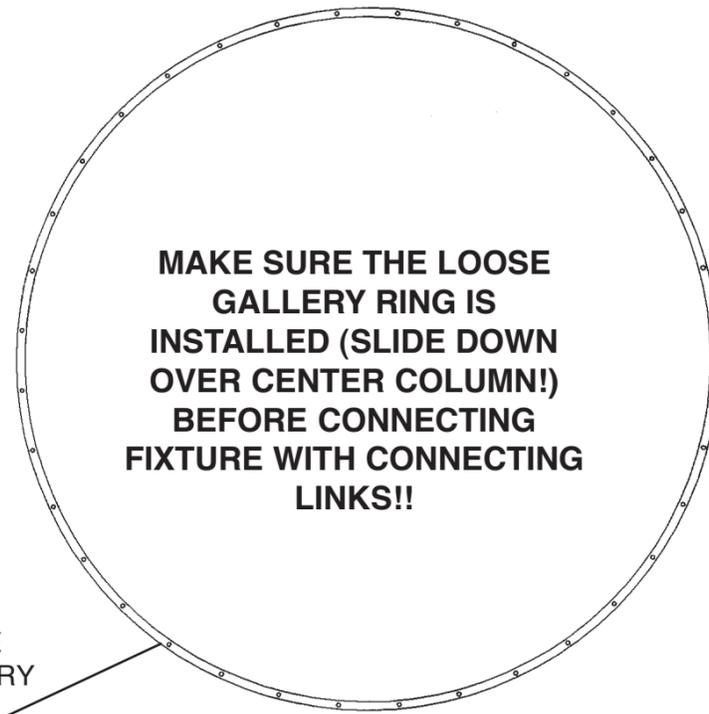

**23** Hook Chains "A" into the top inside ring pin holes. Hook the other end into the loose gallery ring inside pin holes. NOTE: Small jewels on upper end with metal connectors facing outwards.

**24** Slide Chains "B" (FLIP EVERY OTHER ONE) into the slots of the top gallery ring. NOTE: Hold onto the square stone and turn chain side ways, this will allow connector to pass through slot in metal ring. Turn square stone to face the outside of the fixture and lower it until it seats itself in the ring.



**25** Hook the finial into the bottom of the frame.

**26** Hook Chains "C" into the middle gallery ring #4. NOTE: Hold onto the square stone and turn chain side ways, this will allow connector to pass through slot in metal ring. Turn square stone to face the outside of the fixture and lower it until it seats itself in the ring. Hook the other end into the outside pin holes of ring #5.



**27** Hook Chains "D" into the middle gallery ring #6. NOTE: Hold onto the square stone and turn chain side ways, this will allow connector to pass through slot in metal ring. Turn square stone to face the outside of the fixture and lower it until it seats itself in the ring. Hook the other end into the pin holes of the finial.



**28** Hook Ball "E" into the knob located at the bottom of the finial.

